

Technical Information

No. FO 4054

Edition: 07/02 - subject to change

Substitutes: Edition 10/98

Status: valid

Mercury Short Arc Lamp
for Microlithography


HBO[®] 350 W/S

■ Product description

The OSRAM HBO[®] 350 W/S is designed for the manufacture of integrated circuits (photolithography). The lamp emits high radiation in the 350 - 450nm wavelength range and is especially designed for the use within Süss mask aligners.

■ Technical data

Order reference		HBO [®] 350 W/S
Rated lamp wattage	W	350
Rated lamp voltage	V	68
Rated lamp current (=)	A	5.15
Ignition voltage	kV _s	max. 15
Radiant power (wave length range 350 - 450nm)	W	50
Radiant intensity (wave length range 350 - 450nm)	mW/sr	4,700
Average luminance	cd/cm ²	53,000
Electrode gap e	mm	3
Lamp length (overall) l ₁	mm	max. 127
Lamp length l ₂	mm	101 / max. 103
Bulb diameter d	mm	20
LCL a	mm	52.5
Guaranteed life	h	600
Base		SFcY 10-4/15 with thread 8-32 UNC-3B

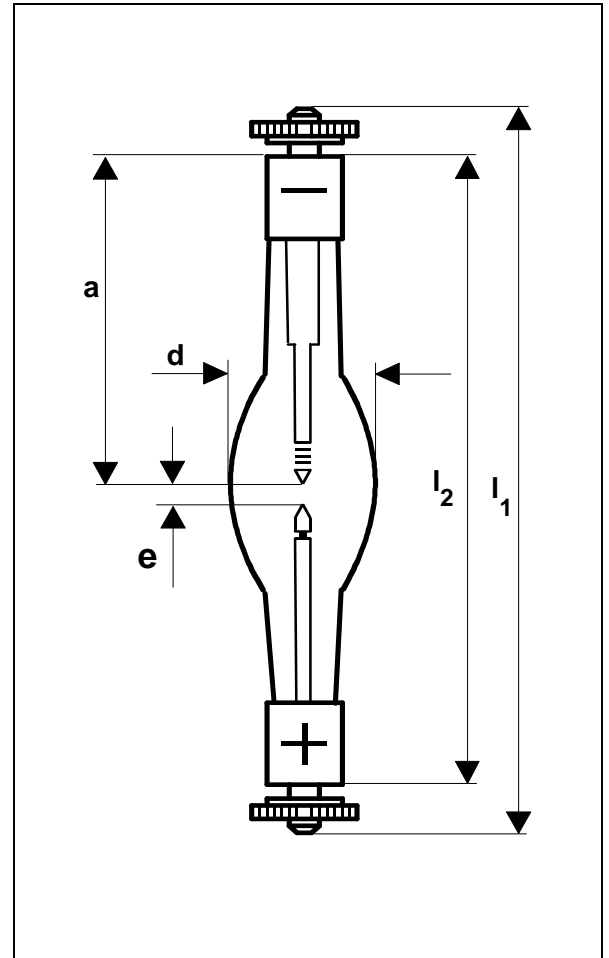

■ Lamp operation

Maximum permissible base temperature	°C	230
Cooling		Convection and cooling fins
Burning position		vertical, Anode (+) underneath

■ Safety Instruction

Due to their high luminous efficacy, the UV radiation which they emit and the high pressure within the lamp, HBO[®] lamps may only be operated within enclosed, purpose-built housings. When a lamp breaks, mercury is released. Particular safety regulations should be paid attention (for details please request technical information sheet no. FO 4574).

